


## OVERVIEW

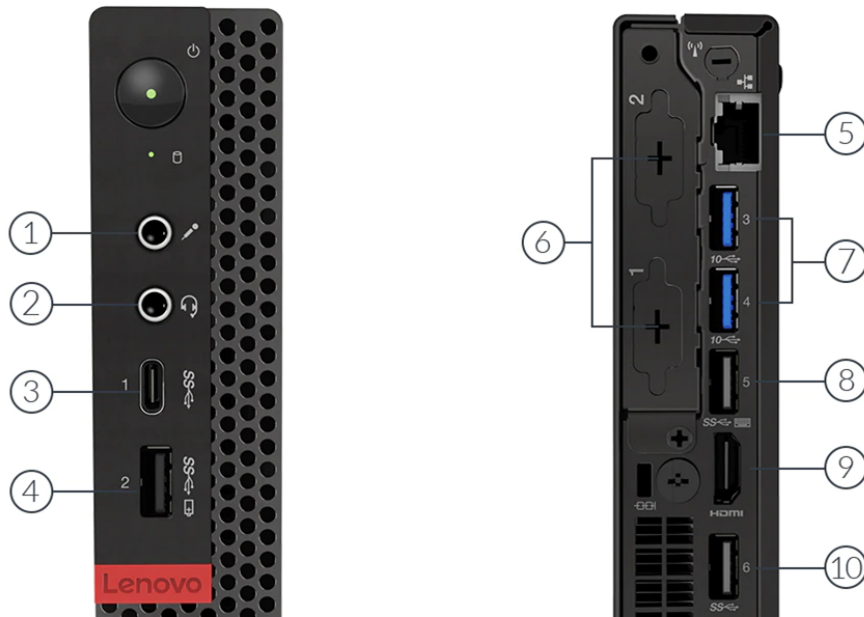

1. Microphone (3.5mm)	6. Optional port 1 and 2 *
2. Headphone / microphone combo jack (3.5mm)	7. 2x USB 3.1 Gen 2
3. USB-C 3.1 Gen 1	8. USB 3.1 Gen 1
4. USB 3.1 Gen 1	9. HDMI
5. Ethernet (RJ-45)	10. USB 3.1 Gen 1

Notes:

- Ports with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

Intel® Celeron®, Intel Pentium®, 8th Generation Intel Core™ i3 / i5 / i7, or 9th Generation Intel Core i3 / i5 / i7 / i9 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G4900T	2	2	2.9GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4930T	2	2	3.0GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5400T	2	4	3.1GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5420T	2	4	3.2GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5500T	2	4	3.2GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Pentium Gold G5600T	2	4	3.3GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8100T	4	4	3.1GHz	-	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8300T	4	4	3.2GHz	-	8MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9100T	4	4	3.1GHz	3.7GHz	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9300T	4	4	3.2GHz	3.8GHz	8MB	DDR4-2400	Intel UHD Graphics 630
Core i5-8400T	6	6	1.7GHz	3.3GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8500T	6	6	2.1GHz	3.5GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8600T	6	6	2.3GHz	3.7GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9400T	6	6	1.8GHz	3.4GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9500T	6	6	2.2GHz	3.7GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9600T	6	6	2.3GHz	3.9GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i7-8700T	6	12	2.4GHz	4.0GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-9700T	8	8	2.0GHz	4.3GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i9-9900T	8	16	2.1GHz	4.4GHz	16MB	DDR4-2666	Intel UHD Graphics 630

### Operating System

#### Operating System\*\*

- Windows® 10 Pro 64
- Windows 10 Home 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

### Graphics

**Graphics\*\*[1]**

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 610	Integrated	Shared	1x HDMI®, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX® 12
Intel UHD graphics 630	Integrated	Shared	1x HDMI, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX 12

Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

**Monitor Support**

**Monitor Support**

Supports up to 3 independent displays via onboard ports (DisplayPort™ + HDMI + 1x optional port [VGA / 2nd DP / 2nd HDMI / USB-C])

**Chipset**

**Chipset**

Intel B360 chipset

**Memory**

**Max Memory[1]**

Up to 32GB DDR4-2666

**Memory Slots**

Two DDR4 SO-DIMM slots, dual-channel capable

**Memory Type**

DDR4-2666

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

**Storage**

**Storage Support[1]**

Up to two drives, 1x 2.5" HDD/SSD + 1x M.2 SSD

- 2.5" HDD up to 1TB
- 2.5" SSD up to 256GB
- M.2 SSD up to 1TB
- Optional Intel Optane™ Memory, M.2

**Storage Type\*\*\***

Disk Type	Interface	RPM	Security
2.5" SATA SSD	SATA 6Gb/s	-	-
2.5" SATA SSD	SATA 6Gb/s	-	Opal
2.5" SATA HDD	SATA 6Gb/s	5.4K	-
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-

# ThinkCentre M720 Tiny

Intel Optane Memory M10	PCIe NVMe, PCIe 3.0 x2	-	-
-------------------------	------------------------	---	---

## RAID

No support

## Notes:

- The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

## Removable Storage

### Optical\*\*

- DVD-ROM, slim (9.0mm), via USB external ODD box
- DVD burner (DVD±RW), slim (9.0mm), via USB external ODD box
- None

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB2 codec

### Speakers\*\*

- Single speaker, 1.5W x1
- Single speaker, 2W x1
- No speakers

## Power Supply

### Power Supply\*\*

Power	Type	Efficiency	Key Features
65W	Adapter	88%	Autosensing
90W	Adapter	88%	Autosensing
135W	Adapter	88%	Autosensing
No power supply	-	-	-

## DESIGN

## Input Device

### Keyboard\*\*

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

### Mouse\*\*

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

## Mechanical

### Form Factor

Tiny (1L)

### Dimensions (WxDxH)

Models	Dimensions
Tiny only	179 x 183 x 34.5 / 37 mm with rubber feet (7.05 x 7.2 x 1.36 / 1.5 inches with rubber feet)

With VESA mount & ODD box	188.4 x 185.38 x 63 mm (7.42 x 7.30 x 2.48 inches)
---------------------------	--

**Weight**

Models	Weight
Tiny only	1.32 kg (2.91 lbs)
With VESA mount & ODD box	1.66 kg (3.66 lbs)

**Case Color**

Black

**Bays**

1x 2.5" disk bay

**Expansion Slots<sup>[1]</sup>**

- One PCIe 3.0 x8, low-profile
- Two M.2 slots (one for WLAN, one for SSD)

**EOU**

(Optional) toolless chassis open (toolless chassis screw required) and toolless M.2 SSD, HDD, memory assembly / removal

**Stand**

- Vertical stand
- No stand

**Mounting**

- VESA mount bracket kit, supports VESA mount 75mm and 100mm
- None

**Others**

- (Optional) Dust filter
- (Optional) Power adapter cage

**Notes:**

1. 2.5" HDD/SSD and PCIe card are mutually exclusive

**CONNECTIVITY****Network****Onboard Ethernet**

Gigabit Ethernet, Intel Ethernet Connection I219-V, 1x RJ-45, supports Wake-on-LAN

**Optional Ethernet**

- Gigabit Ethernet, Intel Ethernet Server Adapter I350-T4, 4x RJ-45, PCIe x4
- No optional Ethernet

**WLAN + Bluetooth<sup>®\*\*[1]</sup>**

- Realtek RTL8821CE, 802.11ac Dual Band 1x1 Wi-Fi<sup>®</sup> + Bluetooth 4.2, M.2 card
- Realtek RTL8822BE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 card
- Intel Dual Band Wireless-AC 3165, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 4.2, M.2 Card
- Intel Dual Band Wireless-AC 8265, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 Card
- No WLAN and Bluetooth

**Notes:**

1. Bluetooth 5.2 is hardware ready but may run at lower version due to OS limitation

**Ports<sup>[1]</sup>****Front Ports**

- 1x USB 3.1 Gen 1 (Always On and fast charge)
- 1x USB-C 3.1 Gen 1
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

**Optional Front Ports**

None

**Rear Ports**<sup>[2]</sup>

- 2x USB 3.1 Gen 1
- 2x USB 3.1 Gen 2
- 1x HDMI
- 1x DisplayPort
- 1x Ethernet (RJ-45)

**Optional Rear Ports**<sup>\*\*\*</sup>

- 2x USB 3.1 Gen 1 (via 2-port USB expansion card, PCIe x1)
- Optional port 1 (one of VGA / 2nd DisplayPort / 2nd HDMI / serial / USB-C 3.1 Gen 1 with DisplayPort function)
- Optional port 2 (serial)
- 4x serial (via 4-port serial expansion card, PCIe x1)
- 1x parallel
- 2x PS/2 (USB to 2x PS/2 dongle)

**Notes:**

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3/4: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

**Monitor Cable****Monitor Cable**<sup>\*\*\*</sup>

- VGA Cable Tiny
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI 1.4 dongle
- DP to VGA cable (1.5M)
- DP to VGA dongle
- HDMI to VGA dongle
- No monitor cable

**SECURITY & PRIVACY****Security****Security Chip**

Discrete TPM 2.0, TCG certified

**Physical Locks**

Kensington® Security Slot

**Chassis Intrusion Switch**

- Chassis intrusion switch
- No chassis intrusion switch

**Fingerprint Reader**

- Touch style fingerprint reader on mouse
- No fingerprint reader

**BIOS Security**

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

**MANAGEABILITY**

## System Management

### System Management

Non-vPro

## SERVICE

### Warranty

#### Base Warranty\*\*<sup>[1]</sup>

- 1-year depot service
- 1-year limited onsite service
- 3-year depot service
- 3-year limited onsite service
- 3-year split limited onsite service
- No base warranty

#### Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

## ENVIRONMENTAL

### Operating Environment

#### Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Gold
- EPEAT Silver
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified
- RoHS compliant

### Other Certifications

#### Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

#### Mil-Spec Test

MIL-STD-810G military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



